

SP


Dry and adiabatic cooling

Engineering data

REMARK: Do not use for construction. Refer to factory certified dimensions & weights. This page includes data current at the time of publication, which should be reconfirmed at the time of purchase. In the interest of product improvement, specifications, weights and dimensions are subject to change without notice.

Last update: 10/05/2019

SP 4B D410-B - T610-B

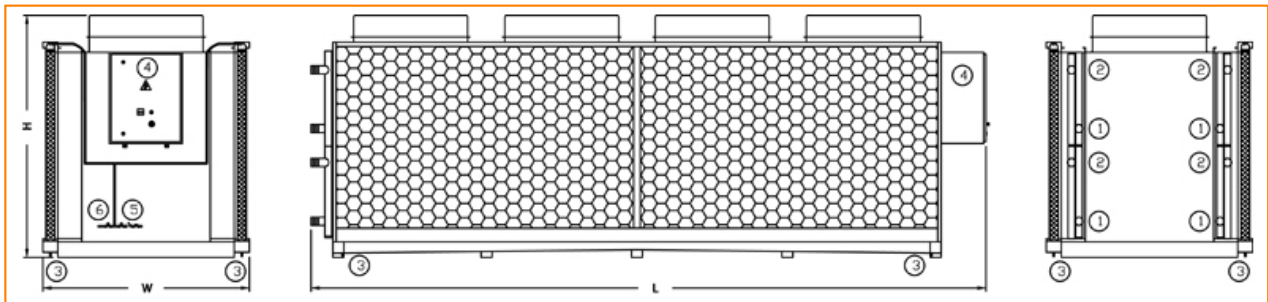

1. Fluid inlet connections; 2. Fluid outlet connections; 3. Pre-cooler water drain; 4. Electrical panel; 5. Pre-cooler city water connection; 6. Pre-cooler piping drain.



Model	Nr. of Fans	Weights (kg)			Dimensions (mm)			Air Flow (m³/s)		Tube Internal Volume (dm³)	Surface (m²)	Connections
		Oper. Weight (kg)	Ship. Weight(kg)	Heaviest Section (kg)	L	W	H	Δ	Υ			
SP 4 B-D410-B	4	3720	3260	3260	7416	2350	2602	64.0	49.9	188.0	3184.0	2
SP 4 B-H410-B	4	3720	3260	3260	7416	2350	2602	64.0	49.9	188.0	3184.0	2
SP 4 B-L410-B	4	3720	3260	3260	7416	2350	2602	64.0	49.9	188.0	3184.0	2
SP 4 B-S410-B	4	3720	3260	3260	7416	2350	2602	64.0	49.9	188.0	3184.0	2
SP 4 B-D610-B	4	4230	3665	3665	7416	2350	2602	61.0	47.6	282.0	4774.0	4
SP 4 B-M610-B	4	4230	3665	3665	7416	2350	2602	61.0	47.6	282.0	4774.0	4
SP 4 B-S610-B	4	4230	3665	3665	7416	2350	2602	61.0	47.6	282.0	4774.0	4
SP 4 B-T610-B	4	4230	3665	3665	7416	2350	2602	61.0	47.6	282.0	4774.0	4